


## >> ABC Profibus Extensionboard

Upgrade your X-CPU. The Profibus Extensionboard can be directly mounted on the X-CPU board. With this board you can enhance your control system by a modern fieldbus component or update the existing communication structures.

The integration of this fieldbus component in the Step 5/7 program is taken over by the X-CPU. It will be displayed as normal peripheral component in the Step 5/7 program and automatically updated by the process image.

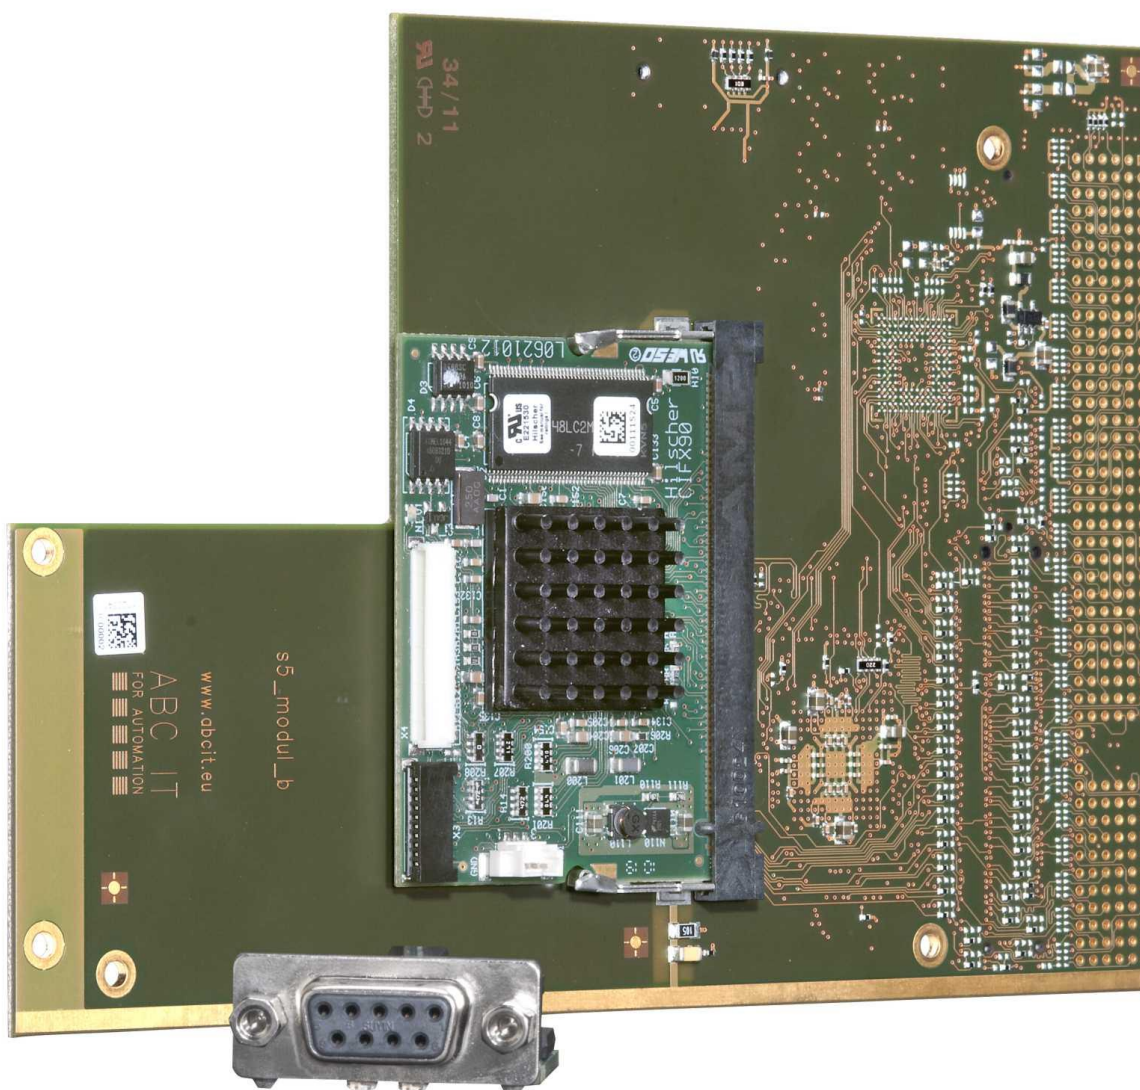

ABC IT GmbH

Oedenberger Straße 65 • D-90491 Nürnberg  
Fon +49-(0)911-394 800 0 • Fax +49-(0)911-394 800 99  
<http://www.abcit.eu> • E-Mail: mail@abcit.eu

## Technical data Profibus Extensionboard:

<b>Bus interface</b>	Mini PCI by adaptation board (included in delivery)
<b>PROFIBUS Master</b> Slaves max. Cyclic data max. DPV1 class 1,2 Configuration data Application spec. parameters	125 7168 Bytes yes 244 Bytes/Slave 237 Bytes/Slave
<b>PROFIBUS interface</b> Transmission rate Data-Transport-Layer Controller Plug connector	EN 50 170 9,6 kBaud to 12 Mbaud netX 100 RS485, floating DSUB 9, female connector
<b>Indication</b>	SYS, COM
<b>Electrical Data</b>	3,3 V / 500 mA
<b>Operating conditions</b> Operating temperature Storage temperature Relative humidity	0°C ... +60°C -10°C ...+85°C During operations:max.90% without condensation
<b>Dimensions (l x w x h)</b>	167 x 109 x 10 mm